


ContentBridge 1000

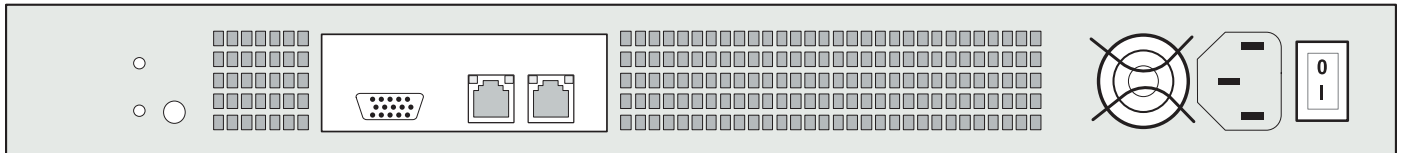

ContentBridge - Rear Panel View

The ContentBridge is an optional component that provides access to MediaGrid for clients not using a MediaGrid File System Driver (FSD). MediaGrid FSDs are lightweight file system drivers deployed on client systems to communicate with ContentServers and ContentDirectors. Omneon offers FSDs for multiple operating systems, including Linux, Windows, and Mac OSX. For clients utilizing operating systems not supported by MediaGrid FSDs, the ContentBridge enables direct access to the MediaGrid system.

ContentBridge 1000 Specifications

Parameter	Specification	Detail
Ethernet	2 Gigabit Ethernet Ports	IEEE 802.3ab, 1000 Base-T
Processor	1 X Processor	3.4GHz Pentium 4
Memory	4GB	DDR2, 667MHz
Environmental	Operating Temperature Humidity	+10C to +35C 10% to 80% non-condensing
Safety	TUV 73/23/EEC Low Voltage Directive including amendments	UL60950-1: 2003 CAN/CSA-C22.2 60950-1-3 Safety of Information Technology Equipment
EMC	FCC Part 15, ICES-003 CISPR 22 89/336/EEC Electromagnetic Compatibility including amendments	Class A for Digital Equipment, USA, Canada EN55022A:1998+A1:2000+A2:2003 EN61000-3-2:2000, EN61000-3-3:1995+A1:2001 EN55024:1998 +A1:2001+A2:2003 Immunity
Dimensions	W: 44.5 cm (17.5 in) H: 4.4 cm (1.72 in) D: 64.8 cm (25.5 in)	1 RU To be mounted in standard EIA-310 19" rack
Weight	7.7 kg (17 lbs.)	
Power	100-240 V, 50-60Hz 2.2 – 0.9 Amp	Single Power Supply
Cooling	614 BTU/Hr	6 fans

Included Accessories

Qty	Description	Note
1	Power Cord	2 Meters (6 ft.)
1	Rack Mount Hardware Kit	19 inch (standard)
2	Ethernet cables	3 Meters CAT 6, RJ45 male to RJ45 male