


High Bandwidth ContentBridge

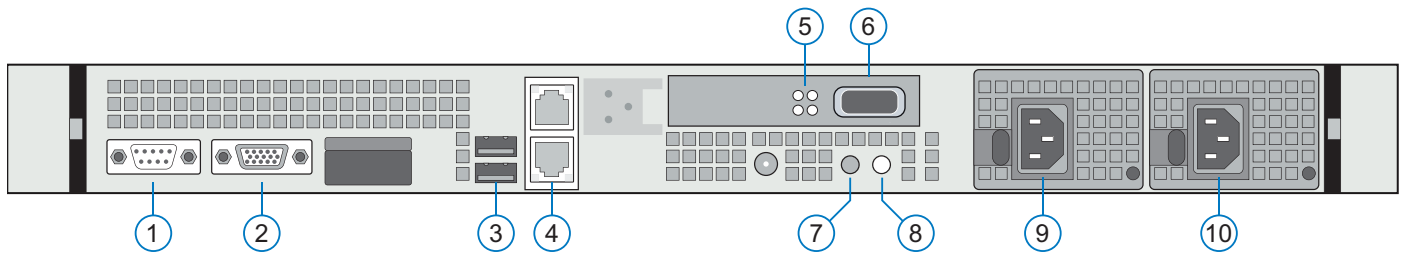

High Bandwidth ContentBridge - Rear Panel View

- 1 Serial connector
- 2 Video connector
- 3 USB connectors (2)
- 4 Gigabit Ethernet ports (unused)
- 5 10 Gigabit Ethernet LEDs
- 6 10 Gigabit Ethernet connector
- 7 System status indicator
- 8 System identification button
- 9 Power supply 1
- 10 Power supply 2

The ContentBridge is an optional component that provides access to MediaGrid for clients not using a MediaGrid File System Driver (FSD). Supported protocols include SMB/CIFS, NFSv3, and FTP.

High Bandwidth ContentBridge Specifications

Parameter	Specification	Detail
Processor	Intel Xeon Processor	Dual quad core 2.26GHz
Memory	12 GB RAM	
Ethernet		Choice of CX4 (IEEE 802.3ak) or Fibre Optic (IEEE 802.3ae 10Gbase-SR) (CLB-2010B-CXF or CLB-2010B-MMF)
Hard Disk	2 x Hard disk drives	3.5" SATA, hot swappable, 250GB Onboard RAID-1 controller
Peripheral Drive	1 DVD-ROM	SATA
EMC	FCC	Class A
	ICES	Class A
	CE Mark	Class A
	VCCI	Class A
	BSMI	Class A
	C-Tick	Class A
	SABS	Class A
	CCC	Class A

■ PRODUCT SPECIFICATION

High Bandwidth ContentBridge Specifications

Parameter	Specification	Detail
Safety	Argentina	IRAM
	Belarus	BELLIS
	Canada	SCC
	China	CNCA or CCC
	Croatia	KONCAR
	European Union	CE
	Germany	TUV
	IECEE	IECEE CB
	Israel	SII
	Kazakhstan	OTAN – CKT
	Kenya	KEBS
	Kuwait	KUCAS
	Mexico	NYCE or NOM
	Moldova	INSM
	Nigeria	SONCAP
	Norway	NEMKO
	Russia	GOST
	Saudi Arabia	KSA ICCP
	South Africa	NRCS
	Taiwan	BSMI
Ukraine	UKRTEST or UKRSERTCOMPUTER	
United States	NRTL	
Uzbekistan	STZ	
Other Connections	Serial data (RS-422)	Not Used
	VGA	Not Used
	Serial keyboard and mouse (USB)	Not Used
	Serial data (USB)	Not Used
	2 x 1000Base-T Ethernet Ports	Not Used
Dimensions	W: 43.4 cm (17.09 in)	1 RU without bezel attached Standard EIA-310 19" rack compatible
	H: 4.3 cm (1.69 in)	
	D: 62.7 cm (24.69 in)	
Weight	15.88 kg (35.02 lbs)	
Power	100-240, 50-60Hz, 1.9 Amp Total	Dual redundant power supplies
Cooling	716.4 BTU/hr	

Included Accessories

Quantity	Description	Note
2	Power Cord	1.83 Meters (6 ft)
1	Rack Mount Hardware Kit	19 inch (standard)



www.omneon.com

U.S. Headquarters:
1237 E. Arques Ave.
Sunnyvale, CA 94085
ph +1 866.861.5690
ph +1 408.585.5000
fx +1 408.585.5099

Europe:
5 Lindenwood
Chineham, Basingstoke
RG24 8QY United Kingdom
ph +44 1256.347.400
fx +44 1256.347.410

Japan:
Ginza San-Chome Bldg. 8F
3-14-1 Ginza, Chuo-ku
Tokyo 104-0061 Japan
ph +81 03.5565.6735
fx +81 03.5565.6736

Asia/Pacific:
20 Loyang Crescent
Singapore 508984
ph +65 6548.0500
fx +65 6548.0504

©2009 Omneon Inc. All rights reserved. Omneon and the Omneon logo are registered trademarks of Omneon, Inc. All other trademarks are the property of the respective companies. Printed in USA | December 2009. The information contained in this document is subject to change without notice or obligation.