


Omneon MediaDirector 2102

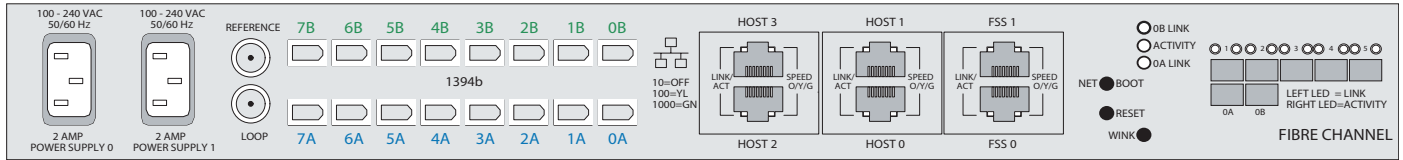

MediaDirector 2102 - Rear Panel View

The MediaDirector is the central server component of an Omneon Spectrum™ media server. The MediaDirector integrates file system, system management, communication and all connectivity including Fibre Channel, IEEE 1394 high-speed serial and Gigabit Ethernet. The Fibre Channel Interface provides multiple 2Gbps data paths between the MediaDirector and the MediaStore, the storage subsystem. The IEEE 1394 high-speed serial interface connects the MediaDirector to MediaPorts for media playout and record. The Gigabit Ethernet connectivity is a standard implementation of high-speed Ethernet for non-real time asynchronous file transfer and support of FTP, SMB and AFP (Apple® Filing Protocol) protocols. There are three Omneon MediaDirector models: The entry-level 2100, the mid-tier 2101 and the 2102, which offers massive throughput for the most demanding system requirements

MediaDirector 2102 Specifications

Parameter	Specification	Detail
Fibre Channel	Fibre Channel Arbitrated Loop Control	6 x FC-AL loop interfaces, 1 or 2 Gbps, 6 x SFP transceivers (plug-in modules) supporting 6 x LC optical fiber interfaces
Ethernet	4 Gigabit Ethernet Ports for customer use	Omneon API, Windows® File System Interface (SMB), FTP Server, AFP Ethernet performance depends on total available system bandwidth. Total system available bandwidth is affected by a number of factors including configuration and usage.
High-Speed Serial I/O	IEEE 1394	8 x IEEE 1394B (800Mbps) buses. 16 x IEEE 1394 bilingual 9 pin copper connectors 2 connectors for each bus
Reference	Analog Black Burst Reference Input (Loop)	Reference Black Local Synchronization (2 x75 Ohm BNC)
Environmental	Operation Temperature Humidity	+10C to +35C 10% to 80% non-condensing
Safety	USL/CNL Low Voltage Directive (73/23/EEC) including amendments	CAN/CSA C22.2 No. 950-95/UL1950, Third Edition EN60950: 1992, A1+A2+A3+A4 Safety of Information Technology Equipment
EMC	FCC Part 15, ICES-003 ICES-003 Directive of Electromagnetic (89/336/EEC) including amendments CISPR 22	Class A for Digital Equipment, USA Class A for Digital Equipment, Canada Compatibility EN55022:1998, EN55024:1998 Emissions from Information Technology Equipment Immunity for Information Technology Equipment
Dimensions	W: 44.3 cm (17.5 in) 48.3 cm (19.0 in) H: 4.4 cm (1.75 in) D: 54.6 cm (21.5 in) 55.2 cm (21.75 in) 56.7 cm (22.31 in)	Chassis only Including mounting brackets 1 RU Chassis front to chassis rear Chassis front to rear of BNC connectors Front of bezel to rear of BNC connectors (Front bezel extends forward [Max. 1.1 cm (0.4375 inches)] from chassis front edge and rack ear plane)
Weight	6.0 kg (13.5 lbs)	
Power	100-240V, 50-60Hz, 164 watts Total	Dual Redundant Power Supplies

■ PRODUCT SPECIFICATION

Included Accessories

Qty	Description	Note
2	Power Cord	1.83 Meters (6 ft.)
8	Cable IEEE 1394 A-B	IEEE 1394 Male to IEEE 1394 Male, 2 meter (6.56 ft)
1	Rack Mount Hardware Kit	19 inch (standard)

Cable Kits:

Fibre Channel cables must be ordered per system configuration. One or more of the following cables will be required:

Part Number	Usage	Description
FCA 105-OF	LC to LC, 1m (Optical Fiber) *	2102 to MS 4000 Series (Also MediaDirector expansion)
FCA 305-OF	LC to LC, 3m (Optical Fiber) *	2102 to MS 4000 Series (Also MediaDirector expansion)

*Includes 2 LC SFPs

Additional 2102:

- A single MediaDirector 2102 is capable of supporting both SD and HD channels simultaneously, as well as IP packet processing. Two processors are dedicated to handling real-time video processing and the other two handle high-speed Gigabit Ethernet traffic. Channel counts and maximum IP bandwidth are subject to total system bandwidth load and system configuration.
- The MediaDirector 2102 has an additional processor dedicated to handling the disk and file subsystems.
- A single MediaDirector 2102 provides eight IEEE 1394 buses available through 16 connectors evenly divided between the two real-time processors.
- The MediaDirector 2102 Fibre Channel interfaces allows the MediaDirector 2102 to control, read and write through each of the six independent Fibre Channel loops. The multiple Fibre Channel loops provide both increased maximum storage capacity and also redundant paths to every disk drive in the system. A system based on the MediaDirector 2102 can be expanded to a maximum of 18 MediaStores, each containing up to 16 disk drives.
- Two of the four available Gigabit Ethernet ports are dedicated to high-speed data transfers, such as FTP or sharing the file system with networked computers. The other two are used for control functions, such as communications with the System- Manager, non-real-time control of channels, system status, configuration management, and file management. There are also two Gigabit Ethernet ports (labeled FSS 0 and FSS 1) that are used solely for Omneon testing purposes.
- Up to four MediaDirector 2102's can be connected to the same file system in order to build a video server with more bandwidth and redundancy than a single MediaDirector 2102 can provide. This EFS (Extended File Sharing) feature requires an Extended File Sharing License.

Additional Features and Functions:

- **External Clock Synchronization** — A VITC decoder is provided for decoding TOD clock embedded in the black burst signal.
- **RAID** — Includes RAID video file protection and supports multiple RAID sets and support for hot spare configurations.
- **Resiliency** — The MediaDirector 2102 supports multiple diagnostic, monitoring and notification features for system resiliency and maximum up time and may be configured to automatically rebuild protected RAID sets in hot spare configurations.



U.S. Headquarters:
1237 E. Arques Ave.
Sunnyvale, CA 94085
ph +1 866.861.5690
ph +1 408.585.5000
fx +1 408.585.5099

Europe:
5 Lindenwood
Chineham, Basingstoke
RG24 8QY United Kingdom
ph +44 1256.347.400
fx +44 1256.347.410

Japan:
Ginza 3-Chome Bldg. 8F
3-14-1 Ginza, Chuo-ku
Tokyo 104-0061 Japan
ph +81 03.5565.6735
fx +81 03.5565.6736

Asia/Pacific:
20 Loyang Crescent
Singapore 508984
ph +65 6548.0500
fx +65 6548.0504

©2010 Omneon, Inc. All rights reserved. Omneon and the Omneon logo are registered trademarks of Omneon, Inc. All other trademarks are the property of the respective companies. Printed in USA | September 2010. The information contained in this document is subject to change without notice or obligation.