


MediaGrid Network Switch 5406

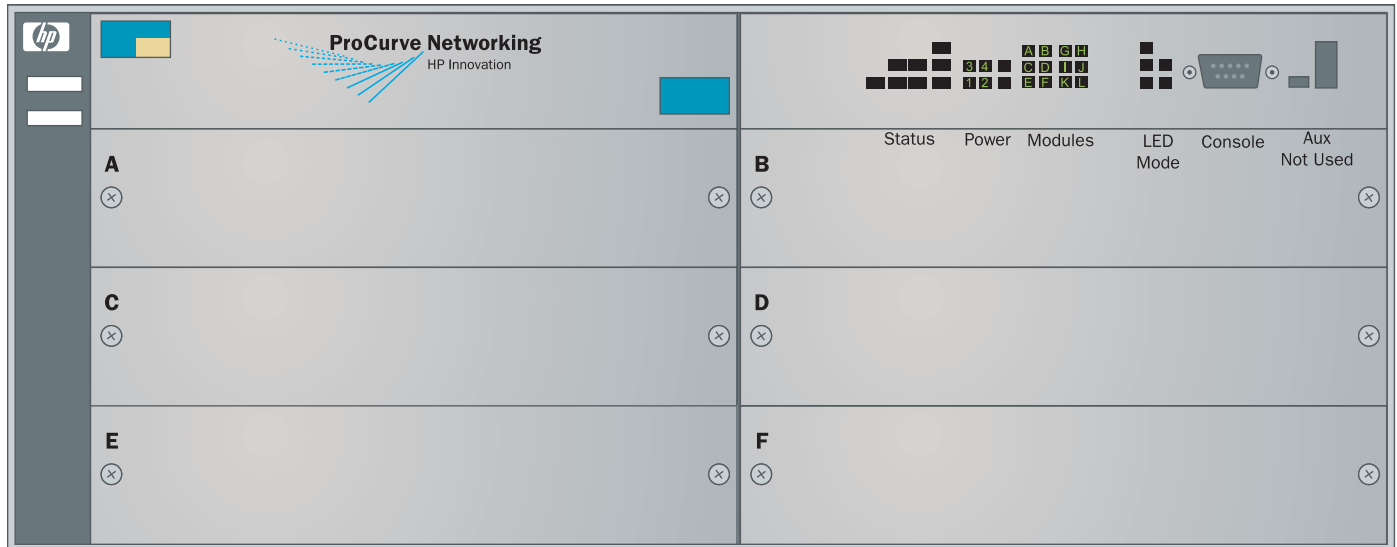

The MediaGrid Switch 5406 includes a 6-slot chassis and associated modules. With a variety of Gigabit interfaces, and 10-GbE capability, the MediaGrid Switch 5406 offers excellent investment protection, flexibility, and scalability, as well as ease of deployment, operation, and maintenance. There are two plug-in module options for the 5406. One offers 72 1GigE ports and the other offers a combination of 48 1 GigE ports and 4 10GigE copper or fibre ports.

MediaGrid Network Switch 5406

Parameter	Specification	Detail
Console	RS-232C	1 DB-9 console port
Environmental	Operating Temperature Operating Humidity	32 °F to 131 °F (0 °C to 55 °C) 15 % to 95 % at 104 °F (40 °C), non-condensing with modules installed
CE	Low Voltage Directive (73/23/EEC) including amendments	EN60950-1: 2001 Safety of Information Technology Equipment
Safety	CSA 22.2 UL IEC EN	No. 60950 60950 60950 60950
EMC	FCC VCCI EN CISPR-22	Class A Class A 55022 Class A
Dimensions	W: 44.45 cm (17.5 in) H: 17.53 cm (6.9 in) D: 45.09 cm (17.75 in)	4 RU Mounts in an EIA-standard 19 in. equipment rack (hardware included); horizontal surface mounting only
Weight	6.3 Kg (14.11 lbs.)	
Power	100-127 / 200-240 VAC 12.0 / 5.7 Amp	Dual, hot swappable, modular power supplies
Cooling	6200 BTU/hr	Including modules

■ PRODUCT SPECIFICATION

SP-5401 Plug-In Module (1Gig Only)

Parameter	Specification	Detail
1 GigE	72 x 1 Gigabit Ethernet Ports	1Gig Ports only Auto-sensing 10/100/1000 IEEE 802.3 Type 10Base-T IEEE 802.3u Type 100Base-TX IEEE 802.3ab Type 1000Base-T Media Type: IEEE Auto-MDIX Duplex: 10Base-T/100Base-TX: half or full; 1000Base-TX: full only

SP-5410 Plug-In Module (1Gig and 10Gig)

Parameter	Specification	Detail
10 GigE	4 x 10 Gigabit Ethernet Ports	IEEE 802.3ak Connectors: CX4 or MMF
1 GigE	48 x 1 Gigabit Ethernet Ports	Auto-sensing 10/100/1000 IEEE 802.3 Type 10Base-T IEEE 802.3u Type 100Base-TX IEEE 802.3ab Type 1000Base-T Media Type: IEEE Auto-MDIX Duplex: 10Base-T/100Base-TX: half or full; 1000Base-TX: full only

Included Accessories

Qty	Description	Note
2	Power Cord	1.83 Meters (6 ft.)
1	Serial Cable	Female DB9 to female DB9
1	Rack Mount Hardware Kit	19 inch (standard)
1	Documentation	CDROM and paper guides
1	EULA	End user license agreement



U.S. Headquarters:
1237 E. Arques Ave.
Sunnyvale, CA 94085
ph +1 866.861.5690
ph +1 408.585.5000
fx +1 408.585.5099

Europe:
5 Lindenwood
Chineham, Basingstoke
RG24 8QY United Kingdom
ph +44 1256.347.400
fx +44 1256.347.410

Japan:
Ginza San-Chome Bldg. 8F
3-14-1 Ginza, Chuo-ku
Tokyo 104-0061 Japan
ph +81 03.5565.6735
fx +81 03.5565.6736

Asia/Pacific:
20 Loyang Crescent
Singapore 508984
ph +65 6548.0500
fx +65 6548.0504