


# ContentDirector

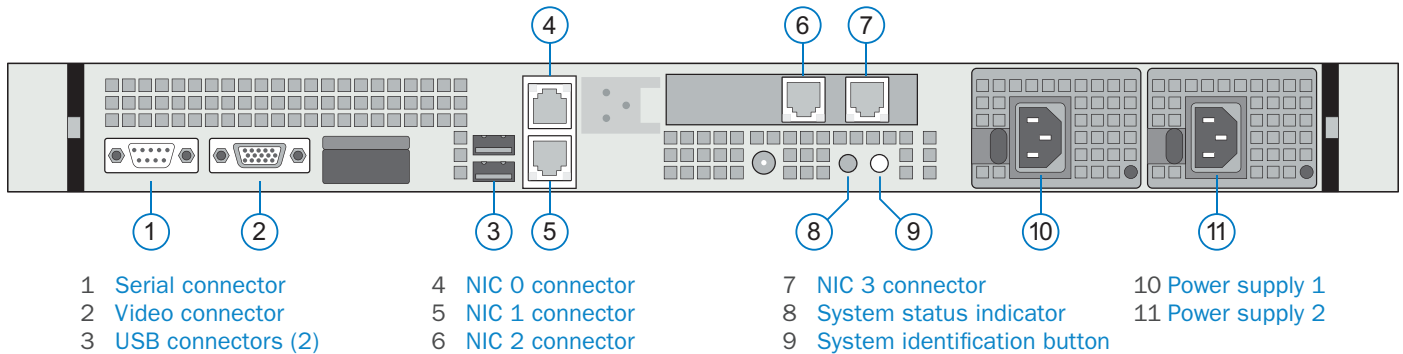

ContentDirectors act as Omneon MediaGrid™ file system controllers, managing the distribution of data throughout the Omneon MediaGrid system and providing data maps to clients for retrieval of content from the systems. They provide this service to clients by creating and presenting a single name space for all the content distributed across Omneon MediaGrid ContentServer storage devices.

System reliability is maintained by deploying two or more ContentDirectors in an active-active configuration within a single Omneon MediaGrid. Client access is load-balanced among all the ContentDirectors, so failure of any individual ContentDirector does not impact overall system operation.

## ContentDirector Specifications

Parameter	Specification	Detail
<b>Processor</b>	Intel Xeon Processor	Dual quad core 2.26GHz
<b>Memory</b>	12 GB RAM	
<b>Ethernet</b>	4 x Gigabit Ethernet Ports	IEEE 802.3ab, 1000Base-T
<b>Hard Disk</b>	2 x Hard disk drives	3.5" SATA, hot swappable, 250GB Onboard RAID-1 controller
<b>Peripheral Drive</b>	1 DVD-ROM	SATA
<b>EMC</b>	FCC ICES CE Mark VCCI BSMI C-Tick SABS CCC	Class A Class A Class A Class A Class A Class A Class A Class A
<b>Safety</b>	Argentina Belarus Canada China Croatia European Union Germany IECEE Israel Kazakhstan Kenya Kuwait Mexico Moldova Nigeria Norway Russia Saudi Arabia South Africa Taiwan Ukraine United States Uzbekistan	IRAM BELLIS SCC CNCA or CCC KONCAR CE TUV IECEE CB SII OTAN – CKT KEBS KUCAS NYCE or NOM INSM SONCAP NEMKO GOST KSA ICCP NRCS BSMI UKRTEST or UKRSERTCOMPUTER NRTL STZ

## ContentDirector Specifications (cont.)

Parameter	Specification	Detail
<b>Other Connections</b>	Serial data (RS-422)	Not Used
	VGA	Not Used
	Serial keyboard and mouse (USB)	Not Used
	Serial data (USB)	Not Used
<b>Dimensions</b>	W: 43.4 cm (17.09 in) H: 4.3 cm (1.69 in) D: 62.7 cm (24.69 in)	1 RU without bezel attached Standard EIA-310 19" rack compatible
<b>Weight</b>	15.88 kg (35.02 lbs)	
<b>Power</b>	110-220V, 50-60Hz, 1.9 Amp Total	Dual redundant power supplies
<b>Cooling</b>	716.4 BTU/hr	

## Included Accessories

Qty	Description	Note
<b>2</b>	Power Cord	1.83 Meters (6 ft)
<b>1</b>	Rack Mount Hardware Kit	19 inch (standard)
<b>4</b>	Ethernet Cables	3 meters CAT6, RJ45 male to RJ45 male



**U.S. Headquarters:**  
1237 E. Arques Ave.  
Sunnyvale, CA 94085  
*ph* +1 866.861.5690  
*ph* +1 408.585.5000  
*fx* +1 408.585.5099

**Europe:**  
5 Lindenwood  
Chineham, Basingstoke  
RG24 8QY United Kingdom  
*ph* +44 1256.347.400  
*fx* +44 1256.347.410

**Japan:**  
Ginza 3-Chome Bldg. 8F  
3-14-1 Ginza, Chuo-ku  
Tokyo 104-0061 Japan  
*ph* +81 03.5565.6735  
*fx* +81 03.5565.6736

**Asia/Pacific:**  
20 Loyang Crescent  
Singapore 508984  
*ph* +65 6548.0500  
*fx* +65 6548.0504